

KXS Series



義大利天潔 fiorentini 工業用清潔設備 www.fiorentini.com.tw



→ 溫度達 58°C 時，自動對排水的液壓回路進行冷卻。



標準配件



920 公厘槍把組



10 公尺高壓軟管




Abbinamenti motore/pompa Engine/pump pairings		
Motore Engine	GM	XM
MEC160	×	
MEC180		×
Benzina Gasoline		×

型號	KXSB15/500	KXS21/500	KXS43/190
編碼	3.023.34.201	3.023.14.446	3.023.14.437
水量(L/H)	900	1260	2580
壓力(BAR)	500	500	190
壓力(PSI)	7252	7252	2756
轉速(RPM)	1450	1750	1750
馬力(HP)	25	30	20
馬力(KW)	18.6	22	15
電壓	汽油引擎式	220V 60HZ	220V 60HZ
尺寸(長 x 寬 x 高)(CM)	120 x 80 x 113	120 x 80 x 113	120 x 80 x 113
重量(KG)	250	250	250



義大利天潔 fiorentini 工業用清潔設備 www.fiorentini.com.tw

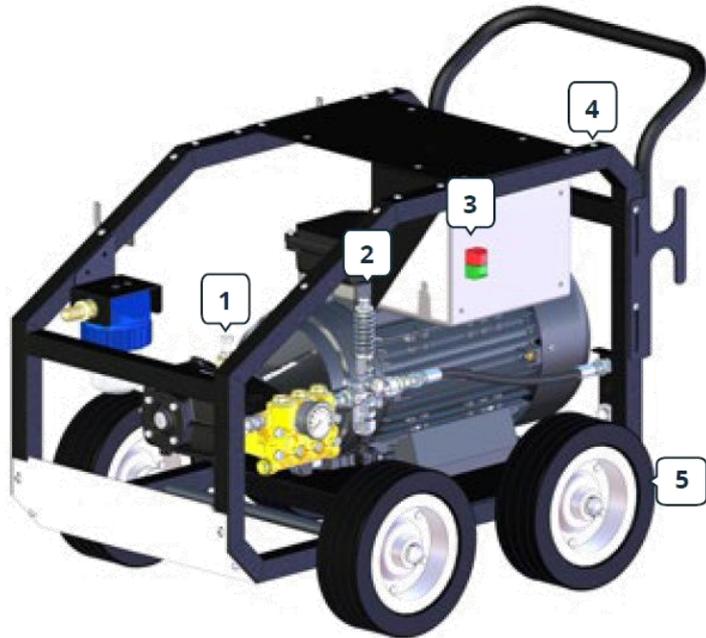

技術配置

- | | |
|----------|-------------------|
| 1. 安全閥 | ※ 內建計時器 |
| 2. 自動洩壓 | ※ KXSB15/500 發電啟動 |
| 3. 配電盤 | |
| 4. 塗漆鋼架 | |
| 5. 駐車制動器 | |

馬達



- MAZZONI MEC系列免維護感應電動機，繞組採用熱敏保護。
- 彈性聯軸器
- 離合器罩

GM



XM



幫浦

- 配備連杆、黃銅頭，和三個陶瓷活塞。

選擇配件



旋轉表面清潔器



計時器



清潔劑(桶裝)



高壓管捲軸(M)



除鏽噴砂組



噴嘴工具組



螺旋噴桿